

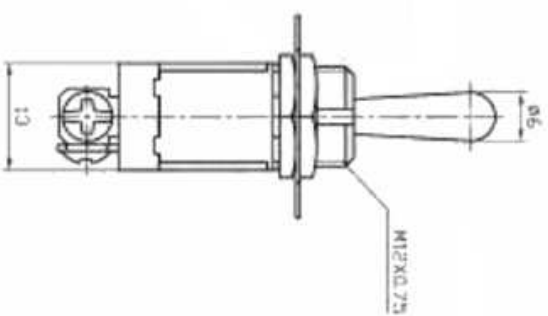



Outline Drawing

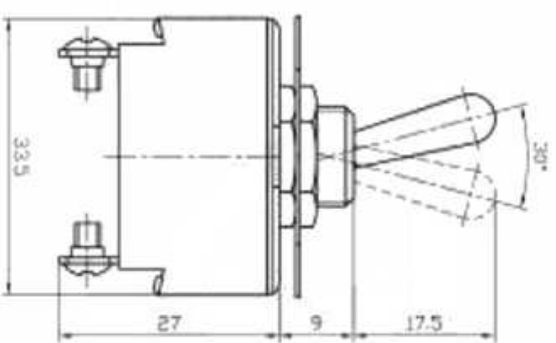

Mounting



Circuitry



## SPECIFICATIONS

Rating: 10A 125V AC; 6A 250V AC

Contact R: 50mΩ max

Insulation R: 500V DC 100MΩ min

Dielectric Strength: 1 Minute 1500V AC

Operating Temperature: -25°C ~ +85°C

Electrical Life: 10, 000 Cycles

TYPE: **KN3(B)-101A**

